


X6L

HIGHLIGHTS

- › Manufactured, Designed, and Engineered by McCormick.
- › 4.5 liter BETAPOWER Engine
- › Standard 18-Speed Gearbox
- › Hydraulic Power Shuttle
- › Push-Button 4WD Front Axle
- › 55 degree steering angle
- › Heavy Lifting 3-Point Hitch
- › Large 4-Post Cab with completely flat Foot Deck
- › Digital Front Dash Display
- › 23 gpm (87 lpm) Superior Hydraulic System
- › Instructor's Seat
- › 25 mph (40 kph) Transport Speed
- › Fully locking front and rear differentials
- › Closed Center Hydraulic System (2018 models & later)
- › 540 and 1000 speed PTO standard equipment

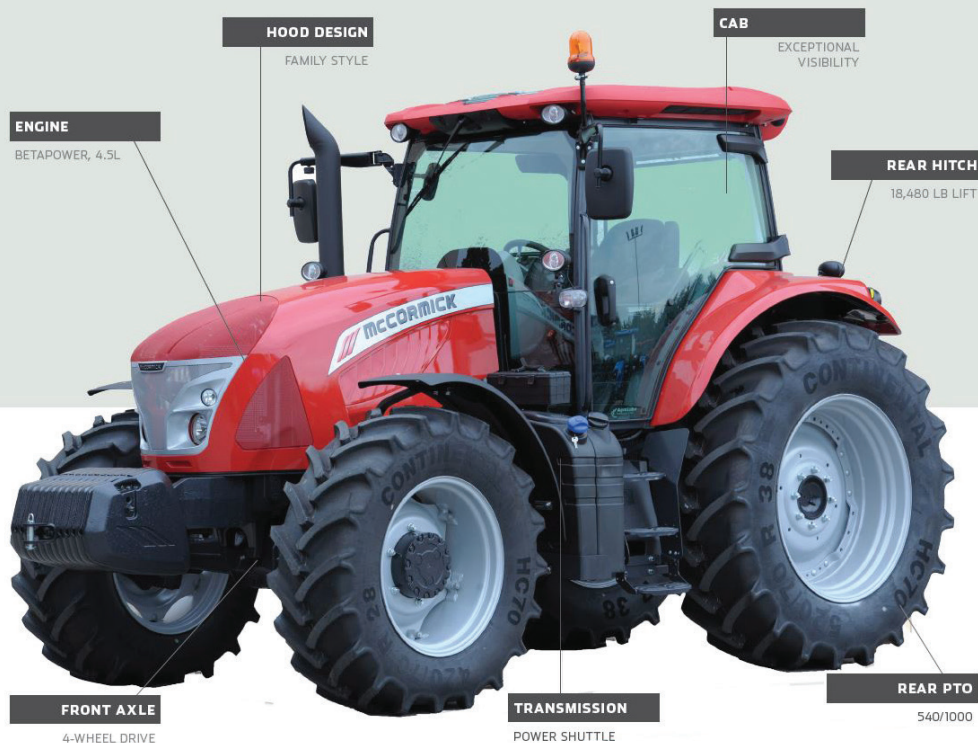

| | |
|----------------------|---------------|
| Tractor Model | X6.470 |
|----------------------|---------------|

| | |
|---------------|--|
| Engine | |
|---------------|--|

| | | |
|-------------------------------|---|----------------------|
| Rated Engine HP @ 2200 RPM | HP (kW) | 150 (110) |
| Rated PTO HP @ 2200 RPM* | HP (kW) | 123 (92) |
| Max. Engine HP @ 1900 RPM | HP (kW) | 163 (120) |
| Max. PTO HP @ 1900 RPM* | HP (kW) | 137 (102) |
| Max. Engine Torque @ 1500 RPM | lb ft (Nm) | 497 (676) |
| Torque Rise | | 41 % |
| Engine Type | BETAPOWER diesel engine; Tier 4 using advanced Selective Catalytic Reduction (SCR) technology | |
| Engine Size | 4.5 Liter, 4-cylinder | |
| Fuel / DEF Capacity | gal (liter) | 70.5 (270) / 10 (38) |

| | |
|--------------------|--|
| Drive Train | |
|--------------------|--|

| | |
|-------------------|--|
| Transmission Type | 54 x 18 main gearbox; 25 mph (40 kph) transport speed |
| Gears and Ranges | 6 gears, 3 ranges; 3-speed powershift |
| Shuttle Type | Power shuttle with left hand control lever near steering wheel |
| Clutch | Wet multi-disc main clutch; foot pedal and push button operation |
| Rear Axle | Heavy duty chassis; internal planetary final drives; wet disc brakes; flange axle |
| Differential Lock | Front and rear fully locking differentials; electronic control; hydraulic engagement |
| 4wd Front Axle | Electro-hydraulic engagement with integrated front axle brakes |

| | |
|---------------------------------------|--|
| Hydraulics, 3-point Hitch, PTO | |
|---------------------------------------|--|

| | | |
|--|-----------|--|
| Implement Hydraulic System Type / Flow | gpm (lpm) | Closed center system** with dedicated implement pump 29 (110), steering pump 10 (38) |
| Rear Remote Valves | | 3 spool valves |
| Rear 3-point Hitch Type | | Category 2/3; electronic control; rear fender controls |
| Rear 3-point Lift Capacity @ Hitch | lb (kg) | 18,480 (8,400) |
| Rear PTO | | 540 / 1000; electro-hydraulic engagement; rear fender controls |

| | |
|------------------------|--|
| Operator's Area | |
|------------------------|--|

| | | |
|---|--|----------------|
| Cab | Large 4-post structure; 2 doors; flat foot deck; standard HVAC | |
| Seat and Front Dash | Deluxe air suspended seat; tilt and telescopic steering wheel; fold-away instructor's seat | |
| Wheelbase | in (mm) | 107 (2,734) |
| Height Over Cab with standard wheel equipment | in (mm) | 110 (2,800) |
| Overall Length with front weights | in (mm) | 207 (5,270) |
| Base Weight without ballast | lb (kg) | 13,530 (6,150) |

* Manufacturers calculated estimate. +/- 5% tolerance. **Open Center System on all models 2017 and earlier